

BSN31001

10AX 3 GANG 1-WAY SWITCH 2M

Updated at: 02-03-2026

VIEW ONLINE: https://www.ave.it/en/catalog/product/bsn31001/

TECHNICAL DATA ETIM

Nominal voltage	250
Mounting method	Module frame
Assembly arrangement	Modular device for domestic switching devices
Method of operation	Rocker/button
Colour	White
With mounting plate	Si
Connection type	Screwed terminal
Illumination	No
Surface protection	Untreated
Rated current	10
Feedback-signal contact	No
Material quality	Thermoplastic
Type of lighting	Other
Material	Plastic
Type of fastening	Engage (snap)
Wiring system	2-pole switch
Number of rockers	3
RAL-number (similar)	9010
Switching current for fluorescent lamps	10
Push button switch	Si
Impact strength	Other
Washing machine switch	No
Surface finishing	Matt
Suitable for degree of protection (IP)	IP40
Device width	86
Device height	86
Label space/information surface	Optional
Function lighting	Other
Number of modules (module system)	2
	No

Anti-bacterial treatment	No

COMMERCIAL DATA

Code EAN13	8008379151080
Standard packing	1,00
Minimum packaging	10,00
Code EAN13 min.pck.	8008379242870
Length min.pck.	185,00
Width min.pck.	160,00
Height min.pck.	95,00
Volume min.pck.	2,81
Weight min.pck.	1124,00
Quantity min. order	10,00
Reference Metel	10AX 3 GANG 1-WAY SWITCH 2M
Product status	In Stock

AVE reserves the right to modify the characteristics of the products shown at any time and without notice. The installation must be carried out by qualified personnel in compliance with the provisions governing the installation of electrical equipment in force in the country where the products are installed. For the conditions of use of the information on the product sheet see conditions of use.

WARNING AND SAFETY INFORMATIONS

The Buyer is obligated to manage packaging with care and keep the material in an appropriate manner, in environments without humidity, and with a temperature not lower than – 5 °C and not higher than + 40 °C.

The Buyer is obligated to inform its own buyers of the conservation methods of the materials supplied by the company AVE S.p.A. The Buyer is obligated to sell the material in the original packaging without damaging it or, if this is not the case, to transmit to its own buyers the instructions that accompany the products by the supplier AVE S.p.A.

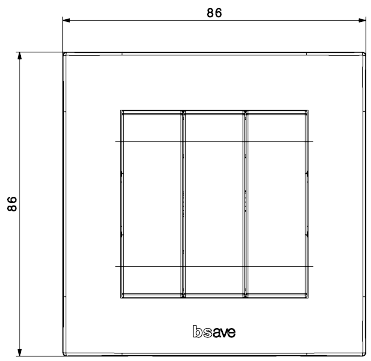
These instructions can be found also in catalogues, technical sheets, lea□□ets, inserts and on the company website (www.ave.it). The Buyer, in case of sales of AVE products in EU countries, is committed to ensure that the product instructions sheets in the AVE packaging, are available in the specific language of the destination country.


Should they not be available, the Buyer undertakes to ask AVE for the integration of the instructions sheets to include the said required language and/or symbols necessary for the export of goods or the Buyer commits himself to provide for them. If the Buyer opens the packaging before selling the products, it must make sure of the apparent integrity of the same products. In case of doubt, the products must not be sold. AVE S.p.A. products are made to be installed. Products and accessories must be installed by qualified personnel.


The products must be installed and used for their designated purpose and in conformity with the applicable standards for the various types of plants and also considering the catalogues specifications, the instruction sheets and the information published on the company website. Anyway, before using the installed products, it is necessary to have the entire plant tested by specialised personnel, to verify functionality and observance of the safety standards according to the laws in force.

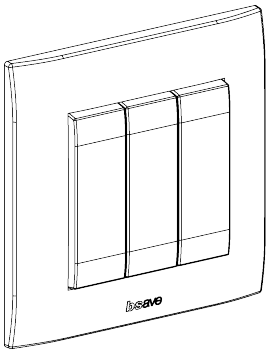
AVE S.p.A. reserves the right to make changes and improvements to products illustrated in the catalogue and available in the price list, without giving prior notice, as a consequence of the constant updating process of production, technology and standards. On request, product sheets or other equivalent documentation is always available at the AVE S.p.A Technical Assistance O□□ce. We recommend to consult the company


bsave


86
86
bsave


21


bsave


bsave